


# STANDARD PLUS



Standard Plus - 21003 924

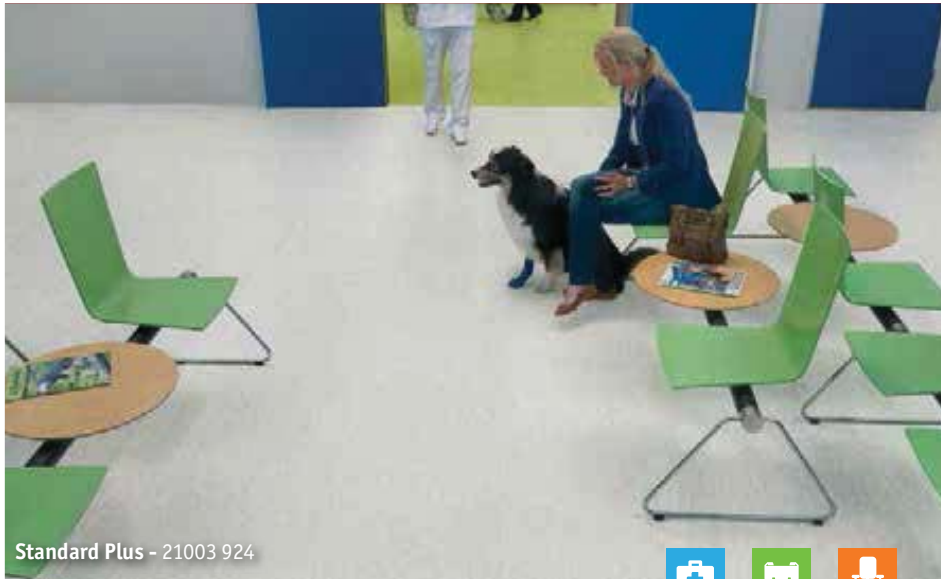

21 003 497  
21 004 497



21 003 924  
21 006 924  
21 005 924



21 003 498  
21 004 498  
21 006 498  
21 005 498



21 003 499




21 003 910



21 003 911  
21 004 911  
21 006 911  
21 005 911



21 003 482  
21 004 482




21 003 912  
21 004 912



21 003 913  
21 006 913  
21 005 913



21 003 914



21 003 915

# STANDARD PLUS

## Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

## Surface Treatment




## Sustainability Tag




## Logistics Information

Available in rolls  
Rolls length: 231m (2.0mm)

Available in rolls  
Rolls length: 251m (1.5mm)



Available in tiles



TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
<b>Classification</b>			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
<b>Characteristics</b>			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m <sup>2</sup>	2 475g/m <sup>2</sup>
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>s</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass	B <sub>s</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass
		Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575	-
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014).  
For more detailed technical information, please contact Tarkett.




21 003 496

## General Information



Play with the Room Designer

# STANDARD PLUS

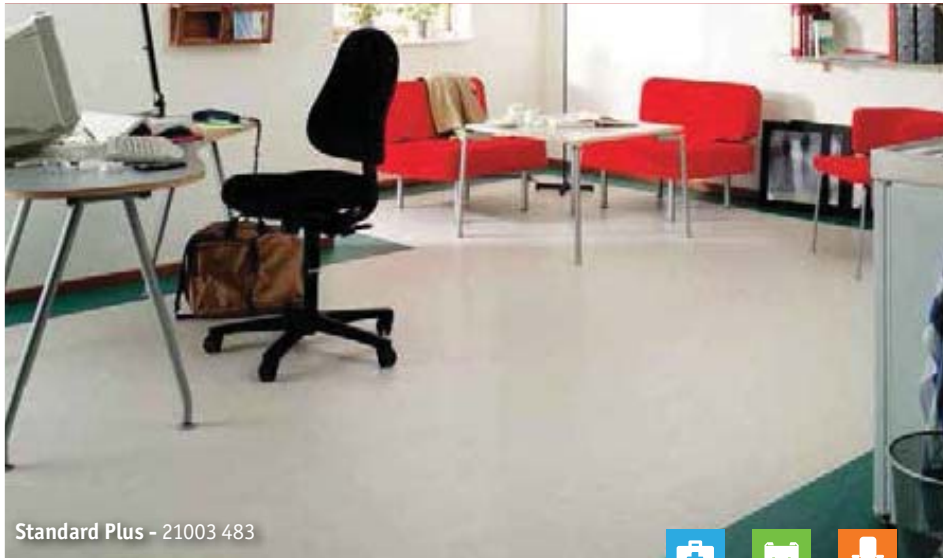

Standard Plus - 21003 483



21 003 921  
21 006 921  
21 005 921



21 003 922  
21 004 922



21 003 923




21 003 494  
21 004 494  
21 006 494  
21 005 494



21 003 919  
21 004 919



21 003 492  
21 004 492  
21 006 492  
21 005 492



21 003 920



21 003 479  
21 004 479  
21 006 479  
21 005 479



21 003 483  
21 006 483  
21 005 483



21 003 484



21 003 485



21 003 916  
21 004 916



21 003 917



21 003 488



21 003 918

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
<b>Classification</b>			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
<b>Characteristics</b>			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m <sup>2</sup>	2 475g/m <sup>2</sup>
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>s</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass	B <sub>s</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass
		Dimensional stability	
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	0575	-
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 846: Part C	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 26987 (EN 423)	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (05/2014).  
For more detailed technical information, please contact Tarkett.



21 003 495  
21 004 495



21 003 493  
21 006 493  
21 005 493



21 003 500

# STANDARD PLUS

## Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

## Surface Treatment



## Sustainability Tag



## Logistics Information

Available in rolls  
Rolls length: 231m (2.0mm)


Rolls length: 251m (1.5mm)

Laying direction: ↑↓

Available in tiles

Laying direction: ↑↑ ↓↓ ⇄ ⇄

## General Information

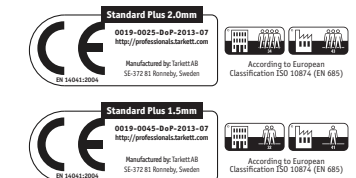

Play with the Room Designer