

Inspiring  
Great  
Spaces™

**Armstrong**<sup>®</sup>  
FLOORING



# ARMALON NG ARMATRANS

COMMERCIAL FLOORING  
HOMOGENOUS VINYL SHEET

# ARMALON NG

(2.0mm x 1.83m x 20m)

Now with **PU** for improved  
maintenance performance

P2\*

Y\*

R9\*

SLIP RESISTANCE



COCONUT



SKY BLUE



COTTAGE BLUE



ROSEMARY GREEN



SILVER GREY



NEUTRAL GREY

Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. Dimensions are nominal.

# ARMALON NG

(2.0mm x 1.83m x 20m)


Now with **PD** for improved maintenance performance

P2\*

Y\*

R9\*

SLIP RESISTANCE

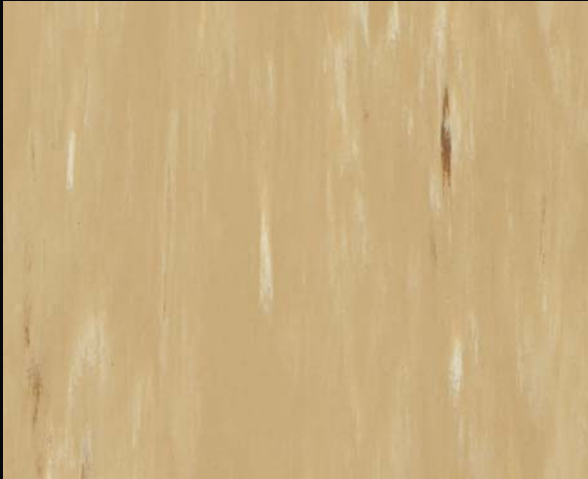

SOLAR BEIGE



LUNAR BEIGE



SLATE GREY



KIMBERLEY

# ARMALON NG

(2.0mm x 1.2m x 20m and  
2.5mm x 1.2m x 17m)

P2\*

Y\*

R9\*

SLIP RESISTANCE



BLACK

(BLACK REQUIRES THE APPLICATION OF POLISH)

# ARMALON NG

(2.0mm x 1.525m x 24m)

Now with **PU** for improved maintenance performance

**P2\*** **Y\*** **R9\*** SLIP RESISTANCE



COTTAGE BLUE



ROSEMARY GREEN



NEUTRAL GREY



SOLAR BEIGE



KIMBERLEY

# ARMATRANS

(1.5mm x 1.525m x 24m)

**P2\*** **Y\*** **R9\*** SLIP RESISTANCE



Now with **PU** for improved maintenance performance



NEUTRAL GREY



SOLAR BEIGE



# ARMALON NG ARMATRANS



## COMMERCIAL FLOORING – HOMOGENEOUS VINYL SHEET

### PRACTICAL







- Economically priced to meet performance and budget needs.
- Polyurethane surface for improved maintenance
- Varied widths and gauges to suit traditional and modular construction

### DURABLE

- Improved surface with excellent resistance to soiling
- Polyurethane surface reduces initial and ongoing maintenance
- Outstanding stability and durability
- Excellent resilience and resistance to indentation and rolling loads


### APPLICATIONS

- Commercial/Industrial
- Modular buildings
- Retail
- Office
- Education
- Housing

	ARMALON NG	ARMALON NG	ARMATRANS
	Colours 2.0mm	Black 2.0mm & 2.5mm	1.5mm
Type of floor covering (EN 654)	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Manufactured in	Australia	Australia	Australia
Overall thickness (EN 428)	2.0mm	2.0mm & 2.5mm	1.5mm
Roll dimensions (EN 426)	1.83m x 20m & 1.525m x 24m	1.2m x 20m & 1.2m x 17m	1.525m x 24m
Slip resistance (AS/NZS 4586)			
Appendix A: Wet pendulum	P2 (Y)	P2 (Y)	P2 (Y)
Appendix D: Oil-wet	R9	R9	R9
Fire resistance (ISO 9239-1)			
Critical radiant flux	≥ 8 kW/m <sup>2</sup>	≥ 11 kW/m <sup>2</sup>	≥ 8 kW/m <sup>2</sup>
Smoke development rate	< 750% minutes	< 750% minutes	< 750% minutes
Classification (EN 685)	Commercial: 33  Industrial: 42 	Commercial: 33  Industrial: 42 	Commercial: 32  Industrial: 41 
Wear Resistance (EN 660-2)	Group P	Group M	Group M
PU surface	Yes	No	Yes

**Please note:** Recommendations are for guidance only. Refer to relevant local, state, and federal construction codes and standards for requirements. Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. All measurements are nominal.

**Contact:**



**Armstrong Flooring Pty Ltd**

29 – 39 Mills Road, Braeside, 3195 Victoria Australia

For further information and samples:

Australia Freecall 1800 632 624

Email [customer\\_services@armstrongflooring.com](mailto:customer_services@armstrongflooring.com) or contact us on the web

[www.armstrongflooring.com.au](http://www.armstrongflooring.com.au)