



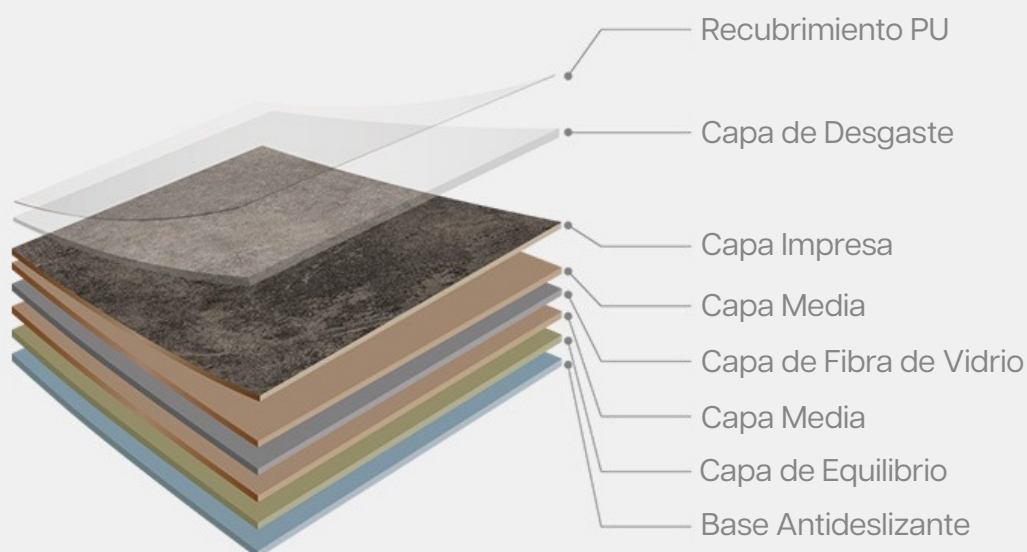

PISO LVT AUTOPOSANTE

60 x 60cm
5mm/0,7mm



Technical Data

Property	Result	Standard
Tile size	600 x 600mm	EN 427
Total Thickness	5.0 mm	EN 428
Wear Layer Thickness	28 mil / 0.70 mm	EN 429
Wear Layer Composition	Virgin PVC / High density PU coats UV-cured	
Packaging	7 pieces / 2.52m ² / Carton 52 cartons / Pallet 20 pallets / 2,620.80sqm / 21,320kg / 1 x 20' container	
Peeling strength of layer	Pass	EN 431
Weight (+-50g / kg/ m ²)	8.3	EN 436
Dimensional Stability	Pass	EN 434
Flexibility	Pass	EN 435
Color Fastness	Above 6	ISO 105-B02
Abrasion Resistance	Class T	EN 660-2
Slip Resistance	> 0.3 R10	EN 13501-1 DIN 51130
Castor Chair Resistance	Pass	EN 425
Electrostatic Properties	≤ 2kv	EN 1815
Staic Indentation	≤ 0.1 mm	EN 433
Usage Category	23/42	EN 685
Radiant Heat Suitability	Up to 85°F / Up to 28°C	
Impact sound Reduction	> 5dB	ISO 10410
Resistance to Chemical	Pass	EN 423
Reaction to fire	Bfl - S1 / under 150 mm 75 or less	EN 13501-1 ASTM E84
Inflammability	8.5	EN 13501-1
Smoke density	562.8	EN 13501-1
Smoke	Pass Q1	ASTM E662 ONORM B3800
Contents of Pentachlorophenol	Not detected	BS 5666 part.6
Emission of Formaldehyde	Not detected	EN717-2
Emission	Class A	CE 14041

GIS-5752-QC/EC
ISO 9001:2015
ISO 14001:2015

GIS-5863-QC/EC
ISO 9001:2015
ISO 14001:2015

