

ArmstrongFlooring™

Natural Creations™ ArborArt

Luxury Vinyl PLank

AMENDOIM
184X1219 MM
DE 2,5 MM Y 0,55 MM CAPA USO




Natural Creations™ ArborArt

2.5mm Luxury Vinyl Plank

Natural Creations ArborArt Luxury Vinyl Plank collection is Australian local stocked. Featuring superior coating technology, Natural Creations™ is both beautiful and practical, while being kind to our planet.



ArborArt is slip resistant (P3 and R10), 100% waterproof, highly durable (0.55mm wear layer), resistant to scuffs, scratches, and stains. Unmatched against heavy foot traffic, the range will stand the test of time, while giving a timeless interior finish with the nature inspired designs.

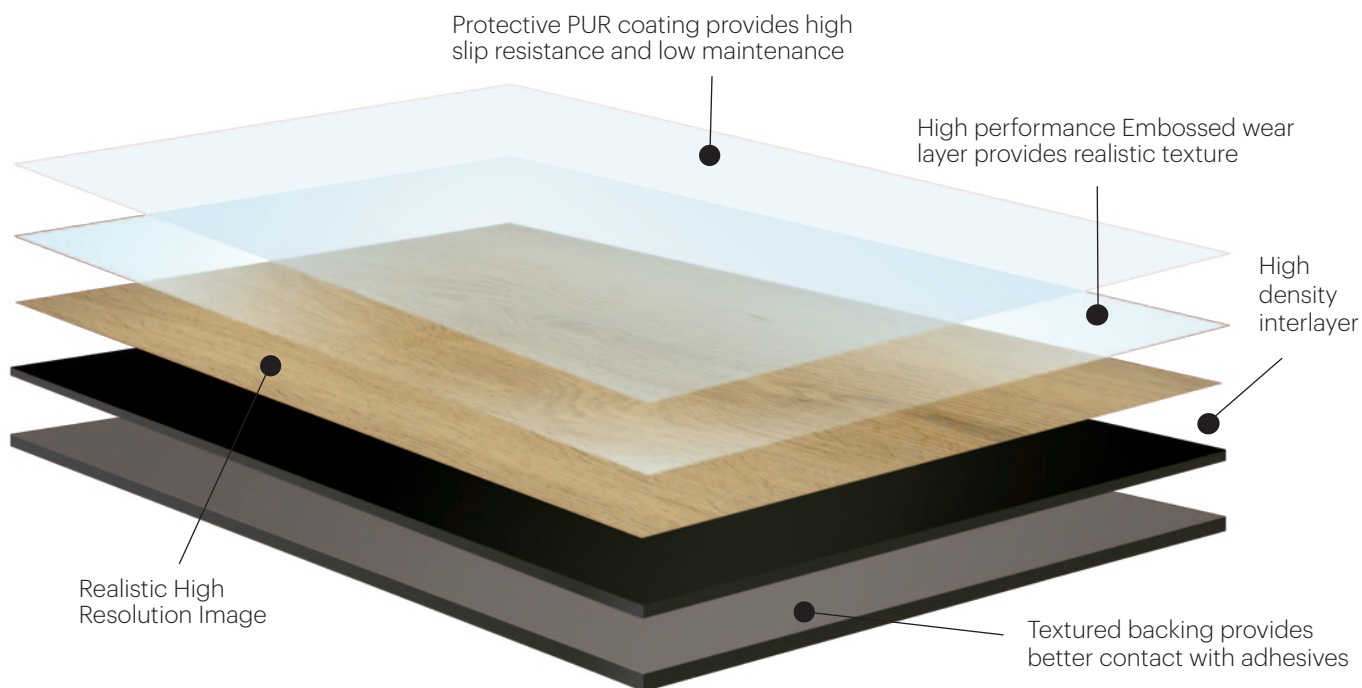

Upload your own photo



Use the Armstrong Flooring Design My Room tool to see and show the dramatic impact flooring can make on your project.

Try Design My Room and see your room transform!



APPLICATIONS



Retail



Hospitality



Office



Education



Residential

PERFORMANCE

P3

Slip Resistance

- P3 – Wet Pendulum
- R10 – Oil wet inclining platform (ramp)



100% waterproof

- Perfect for areas that often see spills



Large format planks

- 185 x 1500mm planks
- Quick and easy to install



Low Maintenance

- Protective Polyurethane Wear Layer reduces initial and ongoing maintenance
- Easy to clean



Sustainable

- GreenTag rated (GreenRate Level A)
- Phthalate Free and Ultra-low VOC
- Fully recyclable



Hygienic

- Enhanced PUR coating provides resistance to soiling



Stain Resistance

- Repels dirt, spills and stains
- Pets and kids friendly



On trend designs

- Featuring Australian Species
- 22 colours, our biggest range yet



Underfloor heating

- Compatible with underfloor heating system up to 27°C



Durable

- 0.55mm commercial wear layer
- Classified as Commercial 33 (heavy) and industrial 42 (general)



Australian Species

Including Spotted Gum, Blackbutt, and Tasmanian Oak, ArborArt features Australia's most sought after timber designs.

Morning Spotted Gum
3L389001



Twilight Tasmanian Oak
3L388801





Victorian Ash
3L162240



Sunset Barnyard Grey
3L168011



Summer Oak
3L195603



RESIDENTIAL

Classic Oak

Introducing ArboArt's timeless Oak Collection.
A modern capsule of elevated essentials.





Country Ironbark-
3L105207



HOSPITALITY



Limed Oak
3L11907



Weathered Oak
3L133210



HOSPITALITY



Shadow Oak
3L111906



OFFICE

Natural Creations™ ArborArt

P3 R10 SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



SUMMER OAK — 3L195603



WEATHERED OAK — 3L133210



VICTORIAN ASH — 3L162240



VINTAGE TIMBER — 3L111802

Natural Creations™ ArborArt

P3 R10 SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



TWILIGHT TASMANIAN OAK — 3L388801



SUNRISE BLACKBUTT — 3L388901



MORNING SPOTTED GUM — 3L389001



SUNSET BARNYARD GREY — 3L168011

Natural Creations™ ArborArt

P3 R10 SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



WILDWOOD CLASSIC — 3L172211



HERITAGE OAK — 3L057015



COUNTRY IRONBARK — 3L105207



AUTUMN BARNWOOD — 3L102605

Natural Creations™ ArborArt

P3 R10 SLIP RESISTANCE

Available in 2.5 x 185 x 1500mm Planks



LIMED OAK — 3L111907



SHADOW OAK — 3L111906



WASHED EBONY — 3L111903



CARBON OAK — 3L165211

Natural Creations™ ArborArt

Product Classification

Type of floor covering	EN / ISO 10582	Luxury Vinyl Plank			
Domestic classification	ISO 10874	23 (Heavy)			
Commercial classification	ISO 10874	33 (Heavy)			
Light industrial classification	ISO 10874	42 (General)			

Physical Properties

Overall thickness	ISO 24346	2.50mm			
Wear layer thickness	ISO 24340	0.55mm			
Polyurethane reinforced	—	Yes			
Squareness and straightness	ISO 24342	Deviation allowed at any point			
≤ 400mm		≤ 0.25mm (Pass)			
> 400mm		≤ 0.35mm (Pass)			
Bevelled edge	—	Yes			AMENDOIM
Size (mm)	ISO 24342	185 x 1500	184 x 1219	229 x 1219	152 x 1219
Packaging	Planks/carton m ² /carton	10 2.77	15 3.36	12 3.34	18 3.34

Technical Performance

Residual indentation	ISO 24343	≤ 0.1mm (Pass)			
Colour fastness	ISO 105-B02	≥ 6 (Pass)			
Wear resistance	EN 660-2	Group T			
Effect of castor chair	ISO 4918	> 25,000 cycles (Pass)			
Dimensional stability	ISO 23999	≤ 0.25% (Pass)			

Fire & Slip Performance

Critical radiant flux	AS ISO 9239-1	≥ 8kW/m ²			
Smoke development rate	AS ISO 9239-1	≤ 750%.minutes			
Wet pendulum	AS 4586 (App. A)	P3			
Oil-wet inclining platform	AS 4586 (Appendix D)	R10			

Environment & Sustainability

GBCA rating	—	GreenTag Level A			
Recyclable	—	Yes			
TVOC Emissions	EN 13419-1	Compliant low emitting VOC emissions			

Installation

Installation to current AS1884	Full stick, LVT-100 adhesive recommended as per Armstrong's installation instructions				
--------------------------------	---	--	--	--	--

Armstrong Flooring™
29 – 39 Mills Road Braeside 3195
Victoria Australia
1800 632 624
www.armstrongflooring.au

