ArmstrongFlooring™

AUSTRALIAN MADE®

Wallflex®

Homogeneous Vinyl Sheet

WWW.GRUPOCOSMOS.COM.AR

Brumby I 6W608339

Wallflex®

Homogeneous Vinyl Sheet

Wallflex® is an Australian made vinyl wall covering that offers a refined and versatile design palette to bring a clean, sophisticated aesthetic to any space. Created with simplicity and elegance in mind, this collection is the ideal solution for a wide range of interiors, including high demand environments such as hospitals and healthcare facilities where durability and hygiene are paramount.

Designed to complement our extensive range of flooring collections, Wallflex® provides a seamless wall to floor solution to inhibit mould and bacteria growth for a superior hygienic finish.

Engineered for long-lasting performance, Wallflex® features a robust surface that resists scratches, scuffs, and dents. This not only preserves the wall covering's appearance over time but also ensures a low maintenance solution that is easy to clean, making it particularly suitable for areas where cleanliness and resilience are essential.

Features & Benefits

LOW MAINTENANCE
PUR coating making it easy to clean and maintain

WET ROOM
Suitable for wet room areas such as showers

HYGIENIC SURFACE
Helps prevent mould and bacteria growth

SCRATCH RESISTANT
Excellent resistant against dent, scratches and scuffs

STAIN RESISTANT
Resistant against stains and discolouration



CHEMICAL RESISTANT
Built for environments exposed to chemicals



ULTRA LOW VOC
Ideal for those with allergies and chemical sensitivities



PHTHALATE FREE
Made without phthalates for a healthier environment

Ice White I 6W608189

Wallflex®

Brumby

This warm, earthy neutral is a versatile colour that adds depth to any space.

Quarters Primary School

Wallflex®

Cool White

Crips and bright shade that creates a fresh, clean, and effortless hygienic feel.

Whyalla Secondary College

Wallflex®

Neutral White

A soft balanced white that exudes simplicity for a clean and serene environment.

QLD Bone & Tissues Services

Wallflex®

Colour Palette

Roll size: 2.0mm x 1.50m x 20m

Stone | 6W608379

LRV 52.39

Brumby | 6W608339

LRV 48.62

Sea Mist | 6W608349

LRV 59.37

Wasabi | 6W608329

LRV 54.27

Dandelion | 6W608369

LRV 60.53

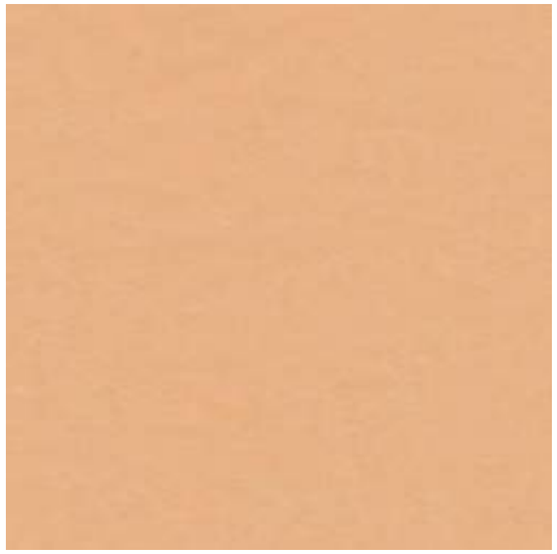

Melon | 6W608319

LRV 45.98

Blue Grey | 6W608219

LRV 61.02

Glacier | 6W608359

LRV 56.62

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only.
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our AU Website or NZ Website

Wallflex®

Colour Palette

Roll size: 2.0mm x 1.50m x 20m

Cool White | 6W608249

LRV 78.89

Ice White | 6W608189

LRV 78.54

Alabaster | 6W608469

LRV 78.63

Neutral White | 6W608229

LRV 74.71

Mushroom | 6W608269

LRV 64.18

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via our AU Website or NZ Website

Wallflex®

Technical Data

Product Classification

Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl
Binder Content	EN ISO 10581.4.1	Type II
Classification (Use Area)	ISO 10874	Walling only
Warranty*	Commercial - available upon request	15 years

*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the commercial warranty, contact your Armstrong Flooring representative.

Physical Properties

Manufactured in	–	Australia
Polyurethane reinforced	–	Yes PUR
Colours (Standard)	–	13
Overall thickness	ISO 24346	2.0mm
Roll width	ISO 24341	1.5m
Roll length	ISO 24341	20m
Coverage/roll	–	30.0m^2
Product weight/m^2	ISO 23997	3.5kg/m^2

Installation

	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions	Full stick, reverse sheets or heat weld seams

Sustainability

GreenTag GreenRate	–	GreenRate Level A
GreenTag LCARate	–	LCARate Gold
Environmental Product Declaration	–	Yes
Best Environmental Practice PVC	–	Yes
TVOC Emissions	–	Compliant with Green Building Council low VOC emission rates

Technical Performance

Fire Resistance (Walls)	AS 5637.1 Cone Calorimeter Average specific extinction area	 Group 1 < 250m^2/kg
Other		
Colour fastness	ISO 105-B02, Method 3	Pass
Residual indentation	ISO 24343-1	Pass
Chemical resistance	–	Good resistance
Flexibility	ISO 24344, Method A	Pass
Seam strength	ISO 16906	Pass

Accreditation

Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.

Learn more

www.armstrongflooring.au/wallflex

www.armstrongflooring.co.nz/wallflex

WWW.GRUPOCOSMOS.COM.AR

ArmstrongFlooring™

Australia
29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand
39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz

Armstrong Flooring and the Armstrong Flooring logo are under license from AWI Licensing, LLC

January 2025